



Document Solutions

> PRINT > COPY > SCAN > FAX


TASKalfa 5501i

TASKalfa 4501i

TASKalfa 3501i

MONOCHROME MULTIFUNCTION PRODUCT
FOR A4/A3 FORMAT

THE IRRESISTABLE USER-CENTRIC, ALL-ROUND PRODUCTIVE MONOCHROME SYSTEM

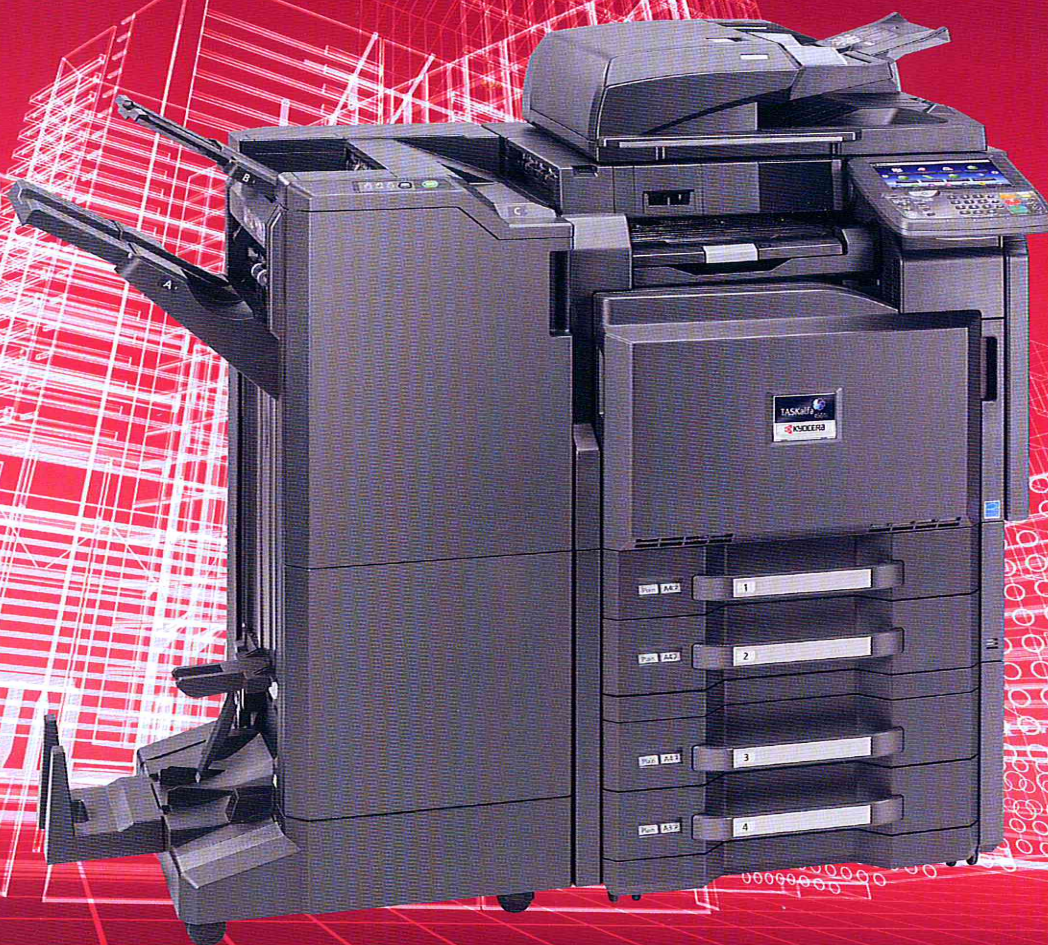

Main Specifications				
Model		TASKalfa 3501i	TASKalfa 4501i	TASKalfa 5501i
Main Function		Copy, Print, Scan, Fax (Optional)		
Writing Method		Semiconductor Laser		
CPU		P1022 (Dual Core) / 800MHz		
Print Speed (A4)	Simplex	35 cpm	45 cpm	55 cpm
Scanning Speed (A4, 300dpi)	DP-770(B)	75/50 ipm	75/50 ipm	75/50 ipm
	(Mono/Color)	45/34 ipm	45/34 ipm	45/34 ipm
	Duplex	80/50 ipm	80/50 ipm	80/50 ipm
	DP-772 (Mono/Color)	160/80 ipm	160/80 ipm	160/80 ipm
Memory/ HDD Capacity		2GB/ 160GB		
Warm Up Time		23 seconds		
Paper Capacity	Standard	1,150 sheets: 2 x 500 sheets (Cassette) + 150 sheets (MPT)		
	Maximum	7,150 sheets (Main Unit + PF-740(B) + PF-770 + MPT)		
Paper Size	Cassette	Min. A5R - Max.12"x18" (304 x 457mm)		
	MPT	Min. A6R - Max.12"x18" (304 x 457mm) & Banner Print of 1,220mm		
Paper Weight	Cassette	60 to 220g/m² (Standard)/ 60 to 256 g/m² (Optional)		
	MPT	60 to 300 g/m²		
Duplex Printing		Paper size: B5 to 12"x18"; Paper weight: 60 to 256 g/m²		
Control Panel		8.5 inch Color Touch LCD Panel		
Dimension (W x D x H) (Main Unit)		648 mm x 767 mm x 747 mm		
Weight (Main Unit)		Approx. 86kg		
Power Consumption (Standard configuration)	Copy/Print Mode	660W or less	780W or less	890W or less
	Stand-by Mode		170W or less	
	Energy Saver		1.8W or less	
Noise (ISO7779/ ISO9296)	Copy/Print Mode	69.5dB(A)	72.5dB(A)	75dB(A)
	Stand-by Mode		58dB (A)	
Copy Functions (Standard)				
Copy Size		Max. A3 (Ledger) - Min. A6R		
Resolution		600 x 600 dpi		
First Copy Time		4.7 sec	3.8 sec	3.2 sec
Zoom Ratio	Manual	25% to 400% (1% per Step)		
	Pre-defined	Easy setting: 4R4E; Detail setting: 13 steps		
Multiple Copy		1 to 999		
Print Functions (Standard)				
Resolution		600 x 600 dpi; 9600 x 600 dpi level		
PDL		PRESCRIBE, PCL6, KPDLL3 (PostScript 3 compatible), XPS, PDF Direct Print		
First Print Out Time		6.0 sec	5.3 sec	4.9 sec
Supported Protocol		NetBEUI, IPv6, IPv4, IPsec, IPP, IPP over SSL, WSD Print, Bonjour		
Operating System Supported		Windows Server 2003, Windows Server 2008, Windows Server 2008 R2, Windows Server 2012, Windows XP, Windows Vista, Windows 7, Windows 8; Apple Macintosh OS 10.x		
Interface		1000BASE-T/100BASE-TX/10BASE-T; USB2.0 High Speed x1; USB Host interface (USB Host) x 4		
USB Memory Printing		Standard		
USB Memory Printing Format		TIFF, JPEG, PDF, XPS		
e-MPS Printing		Job retention and Custom Box function		
Scan Functions (Standard)				
Color Selection		Auto Color (Color/Gray); Auto Color (Color/B&W); Full Color; Grayscale; Black & White		
Resolution		600dpi, 400dpi, 300dpi, 200dpi, 200x100dpi, 200x400dpi		
File Format		TIFF, JPEG, XPS, PDF (MMR/JPG/High-compression PDF), Searchable PDF (Optional)		
Image Type Mode		Text, Photo, Text + Photo		
Transmission Type		Scan to SMB; Scan to E-mail; Scan to FTP or FTP over SSL; Scan to USB; TWAIN Scan; WSD Scan		
Address Storage		2,000 addresses (Common address list), 500 groups (Group address list)		
Fax Functions (Optional)				
Original Size		Max. A3 (Ledger) - Min. A5 (Statement)		
Paper Size		Max. A3 (Ledger) - Min. A5 (Statement)		
Coding Method		MMR, MR, MH, JBIG		
Transmission Speed		33.6/31.2/28.8/26.4/24.0/21.6/19.2/16.8/14.4/12.0/9.6/7.2/4.8/2.4 kbps		
Memory		Standard: 12MB; Maximum: 120MB (with optional fax memory)		
G3 FAX / DUAL FAX / Network FAX		Yes		
Internet FAX		Optional Internet FAX Kit(A)		
Consumables & Options				
Toner Kit		TK-6309		
Maintenance Kit		MK-6319A		
Platen Cover		Platen Cover Type E		
Document Processor		DP-770(B): RADF Type; DP-772: One-path duplex scanning Type		
Paper Feeder		PF-770: 3,000 sheet Paper Side Deck (A4/Letter); PF-730(B): 500 sheets x 2 Paper Deck; PF-740(B): 1,500 sheets x 2 Paper Deck (A4/Letter)		
Job Separator		JS-730/ JS-732: Inner type Job Separator; JS-731: External Job Separator		
Finisher		AK-731: Paper Exit Path for Finisher; DF-770(C): 1,000 sheet Finisher; DF-790(C): 4,000 sheet Finisher; PH-7C: Punch Unit; MT-730(B): 7 bins Mailbox Sorter; BF-730: Booklet Folder; Staple: SH-10 and SH-12		
Embedded OCR		Scan Extension Kit (A)		
Gigabit Ethernet Board		IB-50: For Additional Network		
Wireless LAN Interface		IB-51		
Fax System		Fax System (W)		
Internet FAX		Internet FAX Kit (A)		
Data Security		Data Security Kit (E)		
Document Guard		Printed Document Guard Kit (B)		
Card Authentication		Card Authentication Kit (B) / Card Reader Holder (E)		
Banner Guide		Banner Guide (A)		



Document Solutions

KYOCERA Document Solutions (Thailand) Corp., Ltd.
335 Ratchadapisek Rd., Wongsawang, Bangsue, Bangkok 10800
Tel. (02) 586-0333 Fax. (02) 586-0278, 910-8710

www.kyoceradocumentsolutions.co.th

*KYOCERA does not warrant that any specifications mentioned will be error-free. Specifications are subject to change without notice. Information is correct at time of going to press. All other brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.



KYOCERA Business Partner